


Potência	3 cv		4 cv		5 cv		7,5 cv
Cota (mm)	Mono	Trif	Mono	Trif	Mono	Trif	Trif
A	280	270	292	270	292	280	292
B	100	90	112	90	112	100	112
C	160	140	190	140	190	160	190
D	188	164	219	164	219	188	220
E	165	147	207	147	207	157	192
F	291	274	333	274	333	283	318
G	205	183	266	183	266	203	225
H	12	10	12	10	12	12	12
I	140	100	140	125	140	140	140
J	235	238	242	238	242	235	242
K	68	68	68	68	68	68	68
L	180	180	180	180	180	180	180
M	530	467	541	492	541	488	506
N	117	117	117	117	117	117	117
R (Grooved)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)
S (Grooved)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)	2 1/2" (76,1 mm)
Peso Motobomba (kg)	54,0	42,0	66,0	46,0	69,0	49,0	63,0

## DADOS HIDRÁULICOS

Modelo	CIS-30											
Sucção 2"	Recalque 1 1/2"	60 Hz	M 3 cv Q	M 4 cv Q	M 5 cv Q	M 5 cv H	T 3 cv Q	T 4 cv Q	T 5 cv Q	T 5 cv H	T 5 cv HH	T 7,5 cv Q

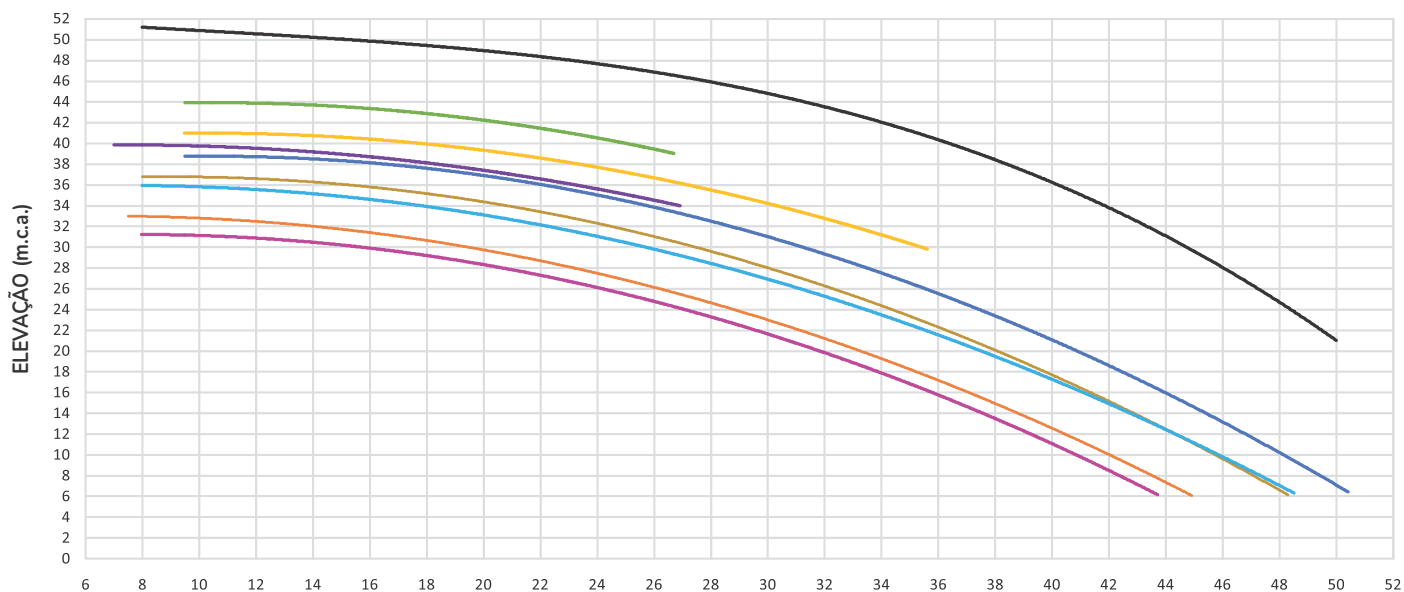

Curvas publicadas conforme Norma ISO 9906 anexo "A".

VAZÃO m³/h