


Potência	3 cv		4 cv		5 cv		7,5 cv
Cota (mm)	Mono	Trif	Mono	Trif	Mono	Trif	Trif
A	295	285	307	285	307	295	307
B	100	90	112	90	112	100	112
C	160	140	190	140	190	160	190
D	188	164	219	164	219	188	220
E	165	147	207	147	207	157	192
F	294	277	336	277	336	286	321
G	205	183	266	183	266	203	225
H	12	10	12	10	12	12	12
I	140	100	140	125	140	140	140
J	237	240	244	240	244	237	244
K	66	66	66	66	66	66	66
L	195	195	195	195	195	195	195
M	532	469	543	494	543	490	508
N	119	119	119	119	119	119	119
R (Rosca BSP)	2 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"
S (Rosca BSP)	2 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"
Peso Motobomba (kg)	56,0	44,0	68,0	48,0	71,0	51,0	65,0

DADOS HIDRÁULICOS

Modelo	CIS-40												
Sucção 2 1/2"	Recalque 2 1/2"	60 Hz	M 3 cv Q	M 4 cv Q	M 5 cv Q	M 5 cv H	T 3 cv Q	T 3 cv H	T 4 cv Q	T 4 cv H	T 5 cv Q	T 5 cv H	T 7,5 cv Q

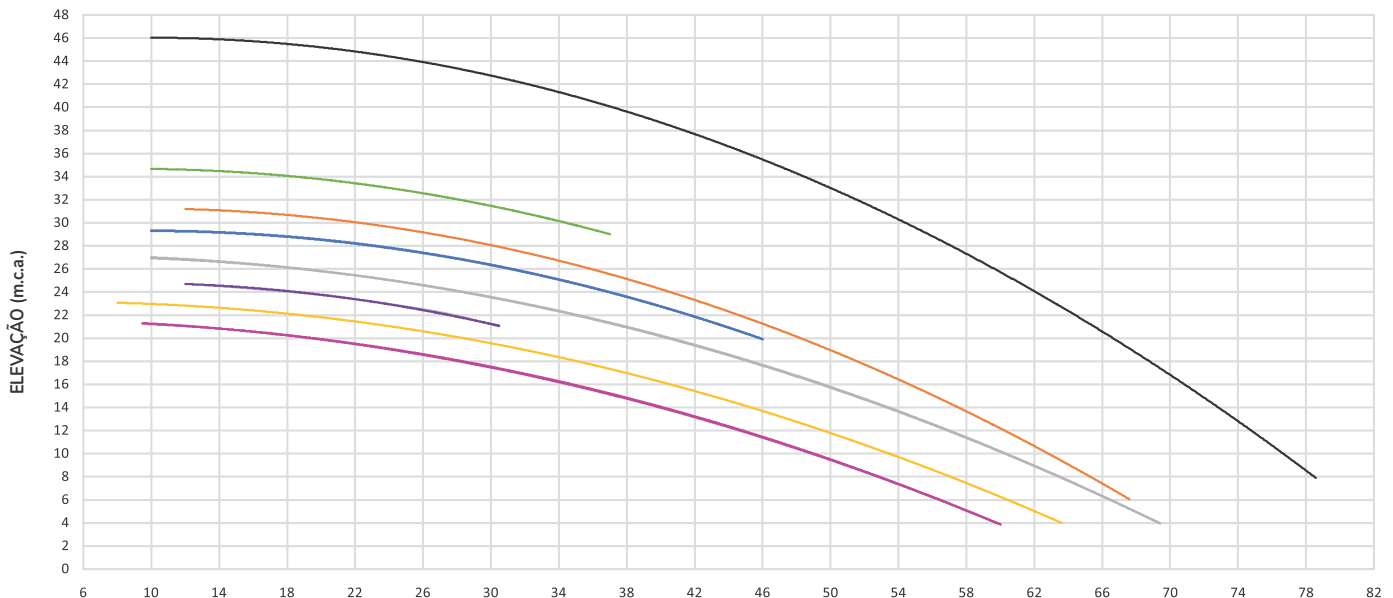

Curvas publicadas conforme Norma ISO 9906 anexo "A".

VAZÃO m³/h